



SPECIFICATION BULLETIN MR140H OPEN SUBSTRATE MIXER
RF/LO: 4.0-18.0 GHz IF:1.0-10.0 GHz

Standard Product Features:


- Surface Mount (Drop-in)
- Triple Balanced
- 6.0 dB Typical Conversion Loss
- 30 dB Typical Isolation
- IF Coverage to 10 GHz
- LO Drive 13 to 17 dBm
- Protective Covers



SPECIFICATIONS	TYPICAL	Min.	Max.
RF /LO Frequency Range	-----	4 GHz	18 GHz
IF Frequency Range (3 dB Bandwidth)	-----	1	10 GHz
Conversion Loss	6.5 dB	----	10.5 dB
LO Drive Level	19.0 dBm	17.0 dBm	21.0 dBm
Isolation, LO to RF	30 dB	20 dB	---
LO to IF	25 dB	15 dB	---
VSWR, RF	2.2:1	---	---
LO	1.6:1	---	---
Input 1 dB Compression	12 dBm	10 dBm	---
Input Two-Tone Third Order IP (IP3)	22 dBm	16 dBm	---
Operating Temperature Range	---	-54 C	+95 C
Storage Temperature Range	---	-65 C	+125 C

Alternate LO Drive Ranges are available. Consult factory for assistance on your requirements.

OUTLINE DRAWING:

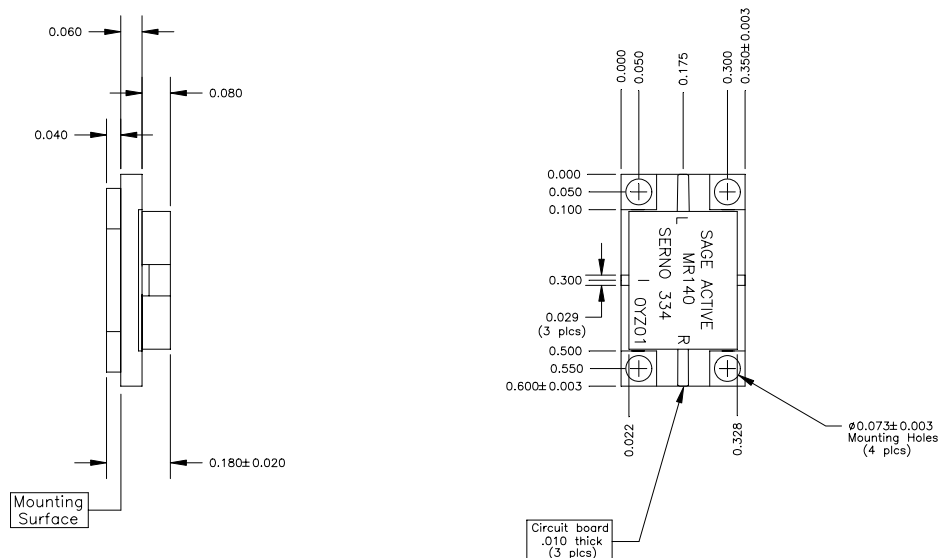

Sage Laboratories, Inc.

8 Executive Drive • Hudson, NH 03051 • Phone: 603-459-1600 • Fax: 603-459-1605

WEB SITE: www.sagelabs.com