




SPECIFICATION BULLETIN **MR160H Triple Balanced Mixer**
RF/LO: .75 to 8.0 GHz IF: 10 to 5000 MHz




Standard Product Features:

- Broadband Performance
- 6.5 dB Typical Conversion Loss
- 25 dB Typical Isolation
- Broadband IF Coverage
- Versatile SMA Package
- Low cost

SPECIFICATIONS	TYPICAL	Min.	Max.
RF/LO Frequency Range	-----	.75 GHz	8.0 GHz
IF Frequency Range	-----	10 MHz	5000 MHz
Conversion Loss	6.5 dB	-----	9.5 dB
LO Drive Range	+22 dBm	+20 dBm	+24 dBm
Isolations, LO to RF	25 dB	12 dB	-----
LO to IF	30 dB	15 dB	-----
VSWR, RF	2.3:1	----	-----
LO	2.0:1	----	-----
Input 1 dB Compression	+14 dBm	+12 dBm	-----
Input Two-Tone Third Order IP (IP3)	+27 dBm	+20 dBm	-----
Operating Temperature Range	---	-54° C	+75° C
Storage Temperature Range	---	-65° C	+125° C

Note 1: Alternate LO drive ranges are available. Consult factory for assistance on your requirement.

OUTLINE DRAWING:

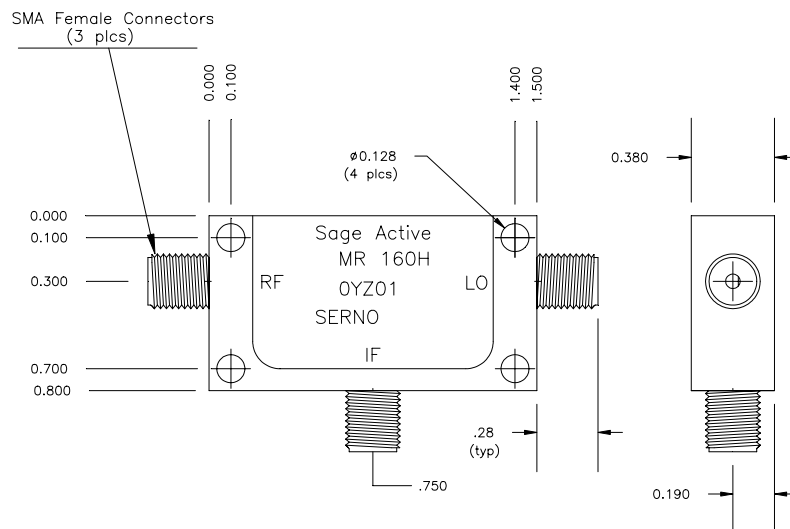

Sage Laboratories, Inc.

8 Executive Drive • Hudson, NH 03051-4902 • Phone: 603-459-1600 • Fax: 603-459-1605

WEB SITE: www.sagelabs.com